



S6L1 SWITCH SINGLE-POLE, SIX-THROW ABSORPTIVE

| | | |
|------------------------------|-------|-------|
| Frequency Range (min) | 1 – 2 | GHz |
| Insertion Loss (max) | 1.4 | dB |
| VSWR (max) | 1.5 | ratio |
| Isolation (min) | 85 | dB |
| Switching speed (max) | 100 | nsec |
| CW RF power, operating (max) | 1 | W |

NOTES:

DC Bias: +5V +/-0.5V @ 240mA max
(Standard) -15V +/-3V @ 50mA max

DC Bias: +5V +/-0.5V @ 300mA max
(-5 option) -5V +/-0.5V @ 60mA max

DC Bias: +15V +/-3V @ 240mA max
(-12 option) -15V +/-3V @ 50mA max


Control: TTL 0 = Low Loss E1 controls J2 – J1
(Standard) TTL 1 = Isolation E2 controls J3 – J1
E3 controls J4 – J1
E4 controls J5 – J1
E5 controls J6 – J1
E6 controls J7 – J1

Absorptive switch: Internal 50Ω terminations at J2, J3, J4, J5, J6 and J7 (in isolation mode).

Switching speed is defined as 50%TTL to 90% (t-on) and 50%TTL to 10%RF (t-off).

ENVIRONMENTAL SPECIFICATIONS:

MIL-E-5400, MIL-STD-202, MIL-E-16400
Operating Temp: -55°C to +85°C
Storage Temp: -65°C to +125°C
Humidity: MIL-STD-202F, M103, Cond B
Shock: MIL-STD-202F, M213, Cond B
Altitude: MIL-STD-202F, M105, Cond B
Vibration : MIL-STD-202F, M204, Cond B
Thermal Shock: MIL-STD-202F, M107, Cond A
Temperature Cycle: MIL-STD-202F, M105C, Cond D

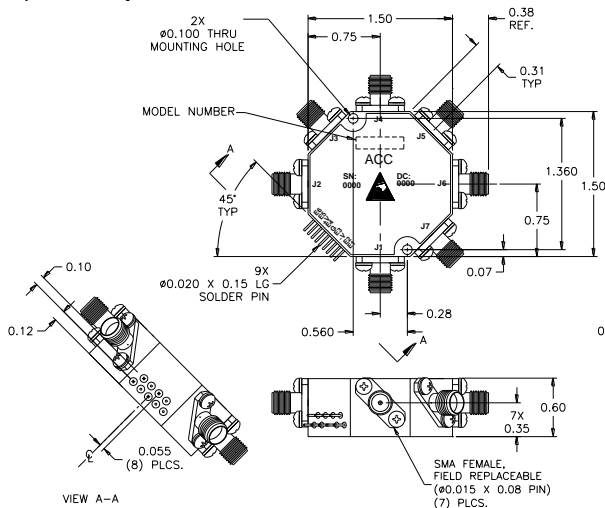

OUTLINE CASE STYLE S6

MECHANICAL SPECIFICATIONS:

Case Style: S6 Outline (Standard logic)
S6-3 Outline (Three-bit logic)

Finish: Gold plate per MIL-G-45204
Connectors: SMA Female per MIL-C-39012
Bias & Control Pins: ø0.02" x 0.15" long
Weight: 65g max
Mounting: ø0.10" through holes (2) places


Three-bit control:
(-3 option)

| | | | |
|----|----|----|---------------|
| E3 | E2 | E1 | Low loss path |
| 0 | 0 | 0 | J2 – J1 |
| 0 | 0 | 1 | J3 – J1 |
| 0 | 1 | 0 | J4 – J1 |
| 0 | 1 | 1 | J5 – J1 |
| 1 | 0 | 0 | J6 – J1 |
| 1 | 0 | 1 | J7 – J1 |
| 1 | 1 | 0 | All off |
| 1 | 1 | 1 | All off |

SCREENING:

Internal Visual per MIL-STD-883, Method 2017
Temperature Cycle: -65°C to +100°C, 10 cycles

Hermetically-sealed switches are fine and gross leak checked per MIL-STD-883, Method 1014.

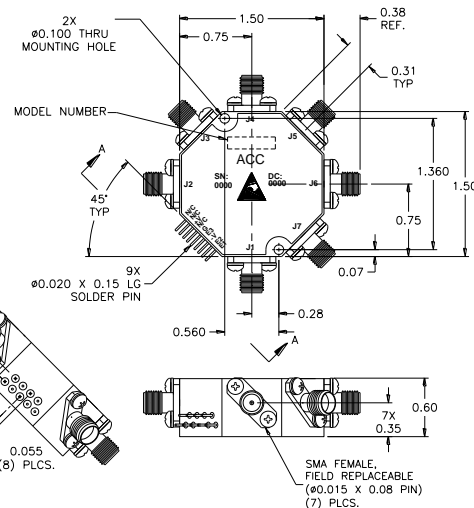

OUTLINE CASE STYLE S6-3

PART NUMBER ORDERING INFORMATION:

- Add "-RC" suffix: RoHS-compliant
- Add "-5" suffix: +/-5V DC supplies
- Add "-5-RC" suffix: +/-5V DC supplies, RoHS-compliant
- Add "-12" suffix: +/-12V to 18V DC supplies
- Add "-12-RC" suffix: +/-12V to 18V DC supplies, RoHS-compliant
- Add "-3": Three-bit logic control
- Add "-3-RC": Three-bit logic control, RoHS-compliant
- Add "-3-5" suffix: Three-bit logic control, +/-5V DC supplies
- Add "-3-5-RC" suffix: Three-bit logic control, +/-5V DC supplies, RoHS-compliant
- Add "-3-12" suffix: Three-bit logic control, +/-12V to 18V DC supplies ECL logic input
- Add "-3-12-RC" suffix: Three-bit logic control, +/-12V to 18V DC supplies, RoHS-compliant
- Add "-H" suffix: Hermetic seal (does not apply to RoHS-compliant models)